

AD

AMRA CR 66-05/7

AMRA CR 66-05/7

CENTER FOR HIGH ENERGY FORMING

SIXTH QUARTERLY REPORT
OF TECHNICAL PROGRESS

G. A. Thurston

January 1, 1967

U. S. Army Materials Research Agency
Watertown, Massachusetts 02172

Martin Company
A Division of Martin Marietta Corporation
Contract DA 19-066-AMC-266(X)
The University of Denver
Denver, Colorado

Sponsored by

Advanced Research Projects Agency

ARPA Order No. 720

FEB 6 1967

Distribution of this document is unlimited.

ARCHIVE COPY

AD 6-10-66
AD 6-4-66

AMRA CR 66-05/7

CENTER FOR HIGH ENERGY FORMING

SIXTH QUARTERLY REPORT

OF TECHNICAL PROGRESS

G. A. Thurston

January 1, 1967

U. S. Army Materials Research Agency
Watertown, Massachusetts 02172

Martin Company
A Division of Martin Marietta Corporation
Contract DA 19-066-AMC-266(X)
The University of Denver
Denver, Colorado

Sponsored by

Advanced Research Projects Agency

ARPA Order No. 720

FEB 6 1967

Distribution of this document is unlimited.

ARCHIVE COPY

1

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

Mention of any trade names or manufacturers in this report shall not be construed as advertising nor as an official indorsement or approval of such products or companies by the United States Government.

DISPOSITION INSTRUCTIONS

Destroy this report when it is no longer needed. Do not return it to the originator.

AMRA CR 66-05/7

CENTER FOR HIGH ENERGY FORMING

SIXTH QUARTERLY REPORT OF TECHNICAL PROGRESS

G. .

January, 7

U. S. ARMY MATERIALS RESEARCH AGENCY
Watertown, Massachusetts 02172

AMCMS CODE 5900.21.25191
PRON. NR. W2 5 C0536 01 A1 AW

MARTIN COMPANY
A DIVISION OF MARTIN MARIETTA CORPORATION
Contract DA-19-066-AMC-266(X)
THE UNIVERSITY OF DENVER
Denver, Colorado

Distribution of this document is unlimited.

ABSTRACT

✓
The "mousetrap" type plane-wave generator has been completed. Initial shock tests have been conducted on 2024-T3 aluminum sheet, copper, 70-30 brass, iron, and maraging steel.

Accuracy of acceleration measurements to determine strain-rates in an expanding aluminum ring using a streak camera is being checked by recording known motion of a non-radial slit cut in a rotating disk.

The correlation between physical properties of metals used in explosive welding and the success of the weld is being investigated.

Checkout is continuing on a computer program to calculate strains in a blank formed into a frictionless die.

A ring cut in a chevron pattern has proved effective in controlling edge pull-in of explosively formed domes. The chevrons contract to form the ring and engage a weld bead on the rim of the blank to limit the amount of pull-in.

7

CONTENTS

	Page
Abstract	11
Contents	111
I. The University of Denver	1
1. Shock Hardening	1
2. Strain Rate Experiments	2
3. Explosive Welding	3
4. High Strain Rate Ductility	4
II. Martin Company	5
1. Strain In a Deformed Blank In Contact with a Die	5
2. Increase of Ductility Due to Explosive Forming	5
3. Blank Stabilization	5
<u>Figures</u>	
1. Revised Specimen Design	7
2. Chevron Pattern on Undeformed Blank	8
3. Chevrons Formed Into Ring to Prevent Further Edge Pull-In of Deformed Part	9

I. UNIVERSITY OF DENVER

1. Shock Hardening

The final design studies for the "mousetrap" type of plane-wave generator were completed during this report period and the problem of "premature" triggering of the probes used for velocity and planarity measurements was solved. This was due to ionization of the shock front. Freon gas introduced into a polyethylene sack enclosing the whole assembly resolved this problem. The proper angle for planarity was readily determined after this procedure was adopted.

Specimens of 2024-T3 aluminum sheet were shocked at pressure levels of 50, 90, 120, 230 and 300 kbars. A rapid increase in hardness was noted up to a pressure of about 100 kbars, after which the increase in hardness was not as substantial for additional increases in pressure. Hardness versus pressure values are as follows:

<u>Shock Pressure, Kbars</u>	<u>Hardness, DPH</u>
0	112
50	143
90	151
120	152
230	156
300	161

No apparent change in the microstructure of the shocked specimen was observed as a function of increasing shock pressure. Transmission electron microscopy indicated that massive dislocation tangles were present that apparently increased with increasing shock pressure. No quantitative data have been obtained with respect to dislocation tangles.

Studies on copper and brass to determine the stacking fault energy as a function of pressure have been initiated. Pure copper and 70-30 brass have been shocked at pressure levels of 45, 95, and 220 kbars. Specimens for X-ray analysis and tensile tests are currently being made.

Transmission electron microscope studies of the twin formation in iron as a function of prior strain plus shock pressure are being conducted. The purpose of this investigation is to elucidate the role of twins in shock hardening behavior of armco iron, and also to study the effect of existing substructure on nucleation and propagation characteristics of these twins. Optical metallography of

January 1, 1967

2.

prestrained samples shocked to 50 and 100 kbars revealed that the number of twins decreased with increasing amounts of prestrain. Furthermore, the straight twins observed in annealed and shocked samples were replaced by bent twins on prestraining. Hardness measurements indicated that samples, prestrained (to various amounts) and then shocked were essentially identical. Also, the hardness of specimens prestrained 20 per cent in compression and those shock loaded to 100 kbars were the same. Preliminary results from substructural studies by transmission electron microscopy show that it becomes difficult for a twin to propagate in the presence of substructure.

Maraging steel (grade 250) has also been shocked at a pressure of 180 kbars and the heat treatment response studied. At 900°F., which is the recommended aging temperature for this alloy, the time to reach maximum mechanical properties was attained in about 30 minutes as opposed to four hours for the conventional heat treatment.

2. Strain Rate Experiments

Dynamic measurements of the displacement-time history of expanding ring specimens of 6061-T6 aluminum were continued. The primary purpose of these tests at the present time is to refine the measuring system in order to obtain results having the degree of resolution required to accurately establish stress-strain rate relationships.

In the initial tests where the displacement-time history was obtained by monitoring one point on the periphery of the ring, it became apparent that this information alone was not sufficient to define the overall behavior of the ring under the conditions of these tests. A slight offset in the point of initiation of the explosive charge, or a varying density in the explosive can cause unsymmetrical expansion of the ring which cannot be detected by observing only one point. For this reason the measurement system was modified so that two points on the periphery of the ring, separated 90 degrees, could be monitored and a continuous displacement-time plot obtained for each point. In addition, four probes located at 90-degree increments along the explosive-steel core interface have been included to establish the time of arrival of the detonation front. Both of these techniques will be used to determine

January 1, 1967

3.

the degree of symmetry with which the ring is expanding and establish a criterion for separating valid tests from invalid tests. This is of utmost importance since the value of stress at any time during expansion is obtained from the equations of motion for a symmetrically expanding ring, and any deviation from symmetry results in erroneous values for stress.

It was also observed that during the deceleration of the aluminum ring, the steel core repeatedly catches up with the ring thereby producing multiple impacts. Once this happens, the test is no longer valid since the aluminum ring is trying to decelerate at a faster rate than the steel core will permit. To eliminate this problem the specimen assembly is being redesigned. The configuration shown in Figure 1 has been selected for the next series of tests. In this geometry the momentum transferred to the steel from the explosive will be concentrated in much smaller elements of mass as the shock wave travels radially outward. It is believed that this will eliminate most of the wave propagation problems associated with the previous geometry, and permit the specimen ring to expand freely over much longer periods of time. This will permit extended measurements over which stress-strain-strain rate behavior can be determined.

A method has been devised wherein the accuracy of the acceleration measurements can be measured. This will be accomplished by using the streak camera system to record the motion of a non-radial slit cut in a rotating disk. The velocity and acceleration of the slit will then be determined from graphical differentiation of the recorded displacement time data. A check on the accuracy of this technique can then be made by calculating the velocity and acceleration of the slit directly from the known slit position and the angular velocity of the disk. The results of these tests will establish whether or not the technique presently being used to determine acceleration should be pursued further or if a different approach should be considered wherein acceleration is measured directly.

3. Explosive Welding

A comprehensive survey of the literature has been completed and emphasis has been placed on determining the

relative importance of the material properties of the metals in the weld on the quality of explosive weld obtained. From the literature survey, data relating to forty-four welds of dissimilar metals involving thirty-one different metals have been collected. A program to analyze and investigate the correlation, if any, between the physical properties of the metals in the weld and the success of the weld is currently in progress and some preliminary results have been obtained.

Preliminary results indicate that two physical properties appear to be important for good high quality explosive welds. These are (1) the ductility of the driver plate and (2) the solid solubility between the couple, specifically whether or not the two metals form a hard, brittle intermetallic on melting. Results indicate that it is necessary to have greater than five per cent ductility in the driver plate in order to obtain a good explosive weld. To avoid failure by crack propagation large regions of brittle intermetallic should not be present in the weld interface.

Work will continue on the analysis of data generated from the literature survey. Experimental work will also be started to verify those correlations obtained from the analysis.

4. High Strain-Rate Ductility

The aims of the high strain rate, or "dynamic" ductility program were selected as follows:

- a.) Substantiation of the existence and establishment of the extent of dynamic ductility;
- b.) Determination of the mechanism(s) for dynamic ductility, and thereby ductility enhancement under HERF conditions; and,
- c.) Establishment of guidelines for the prediction of formability at high strain rates.

From a literature survey, as yet incomplete, it was concluded that uniform strain increases with increasing strain rate, to a maximum just prior to the attainment of a critical impact velocity. This occurs, in general, with inherently ductile (FCC-base) materials only. One or more of several mechanisms could be responsible for this enhanced ductility, e.g., the onset of plastic stress wave

January 1, 1967

5.

propagation, onset of precipitation during straining, point defect production, dislocation dynamics, superplasticity effects. Both analytical and experimental studies are underway which hopefully will permit a selection of the operative mechanism(s).

II. MARTIN COMPANY

1. Strain In a Deformed Blank In Contact With a Die

The computer program being written for this analysis has been revised in two places. Originally, the program was written to accept, as input data, an initial estimate on the radial displacements. It was assumed that this initial estimate would be such that the strains over the flange, draw radius, and die cavity would be continuous. During checkout of the program, it became apparent that it was unrealistic to expect continuity in the input, so this program has been rewritten to accept input that is continuous in each of the three regions of the die but discontinuous at the junctures of the regions.

The second revision in the program is the addition of a numerical integration of the total work done by the stresses in the blank during forming. This amount of work is a useful parameter in estimating explosive charge weight requirements.

2. Increase of Ductility Due to Explosive Forming

Preliminary tests indicate that the primary cause of increased ductility in explosively formed domes is the biaxial stress state. For this reason, Martin's efforts in this area will be confined to static bulge tests in order to have effective stress-effective strain curves of sheet material to use in our computer programs for predicting strains in finished parts.

3. Blank Stabilization

R. Chihoski of our Manufacturing group has adapted some of his fixtures to produce a weld bead on the rim of our small blanks. He assures us that a fixture to lay a bead on full scale blanks would not be expensive. It could be similar to the rotating arm that held the plasma arc torch used to trim the flange from the 10 foot diameter domes explosively formed under the Titan II

Improvement Program.

A weld bead is the cheapest and most effective means that we have now to produce a rim of a blank. The rim prevents uneven draw and makes edge pull-in an independent parameter in the forming process. Controlling the pull-in helps make the forming a repetitive process.

In our past work, the rim on the blank engaged a lip machined on the hold-down ring. This has the disadvantage of leaving a gap between the undeformed blank rim and the lip. This gap allows wrinkling as the edge of the blank compresses. The gap is now avoided by cutting a ring of the final draw radius into a chevron pattern. The chevrons are extended against the blank rim as shown in Figure 2. The chevrons slide under the hold-down ring (not shown in the photograph) as the blank draws in and reform the ring to prevent further pull-in, Figure 3.

The chevrons have the further advantage that they replace the need for the lip on the hold-down ring so that they can be used without modifying our present dies.

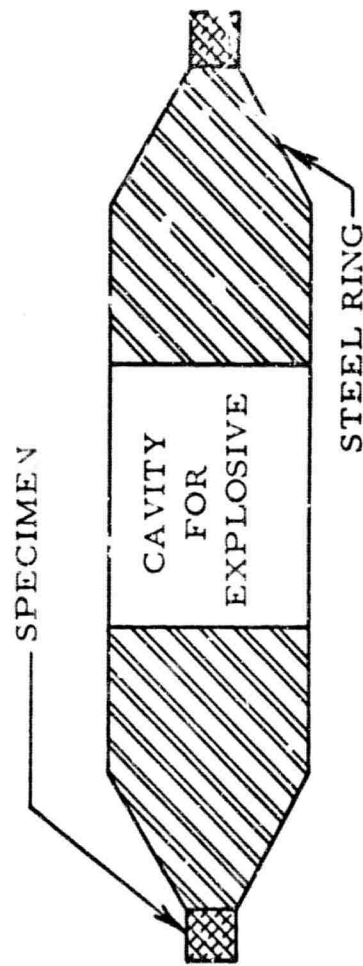


Figure 1. Revised Specimen Design

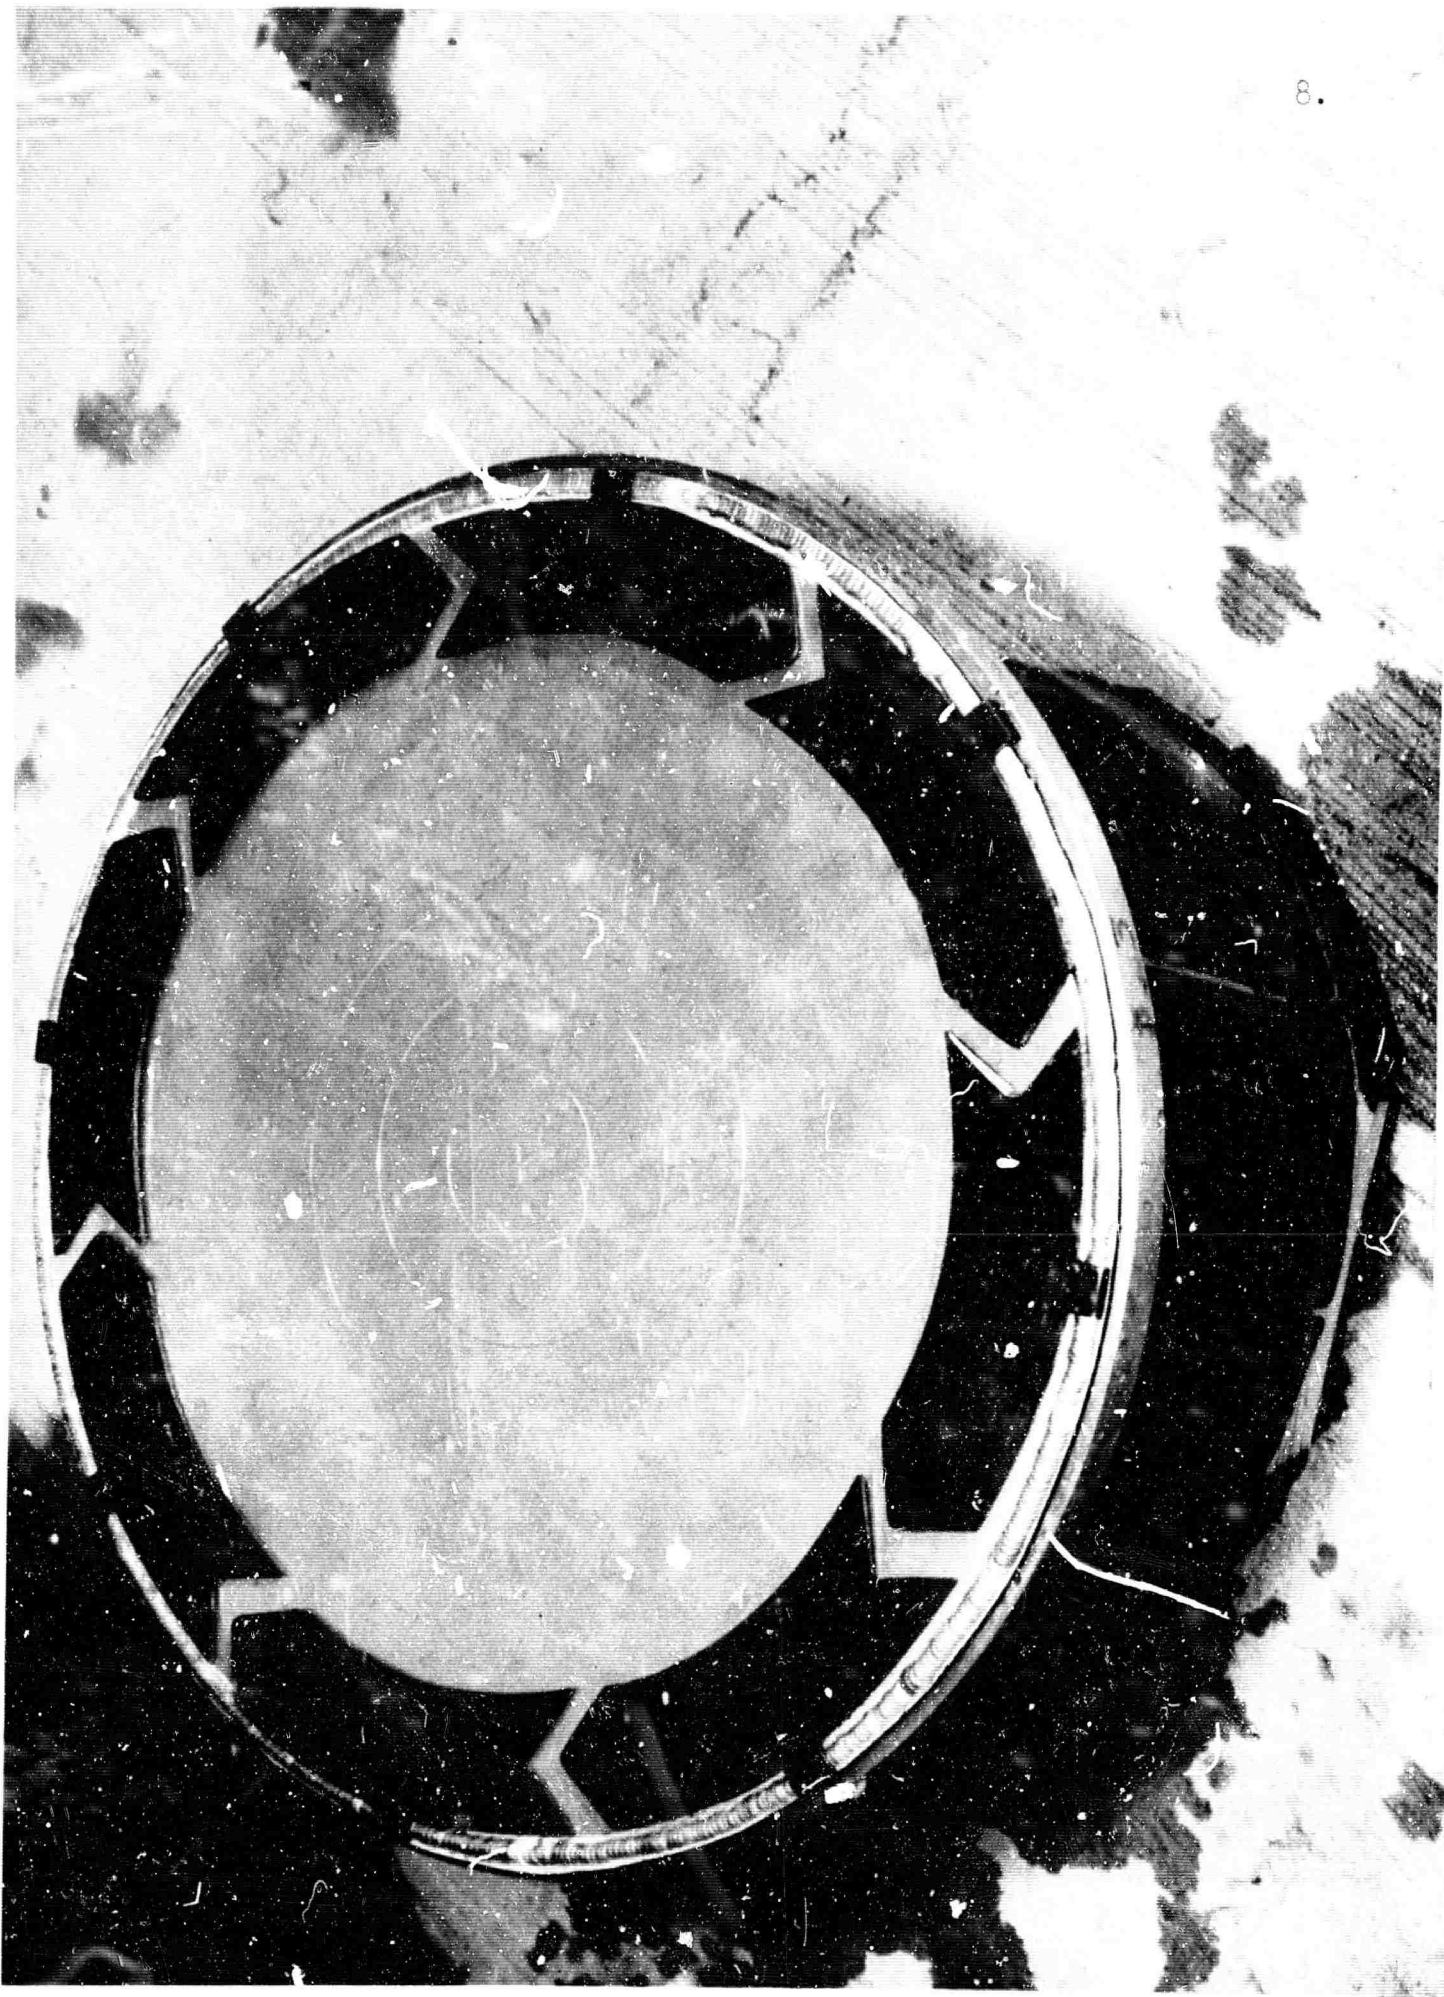


FIGURE 2. Chevron Pattern on Underformed Blank



FIGURE 3. Chevrons Formed Into Ring To Prevent Further
Edge Pull-In of Deformed Part

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) The Martin Company Denver Division - University of Colorado Denver, Colorado - Denver, Colorado		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP N/A
3. REPORT TITLE Center for High Energy Forming		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Sixth Quarterly Report of Technical Progress - January 1967		
5. AUTHOR(S) (Last name, first name, initial) Thurston, Gaylen A.		
6. REPORT DATE January 1967	7a. TOTAL NO. OF PAGES 8	7b. NO. OF REFS 0
8a. CONTRACT OR GRANT NO. DA 19-066-AMC-266(X)	9a. ORIGINATOR'S REPORT NUMBER(S) AMRA CR 66-05/7	
b. PROJECT NO. AMCMS Code 5900.21.25191	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c.		
d.		
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.		
11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY U. S. Army Materials Research Agency Watertown, Massachusetts 02172	

13. ABSTRACT

The "mousetrap" type plane-wave generator is now completed. Initial shock tests have been conducted on 2024-T3 aluminum sheet, copper, 70-30 brass, iron, and maraging steel.

Accuracy of acceleration measurements to determine strain-rates in an expanding aluminum ring using a streak camera is being checked by recording known motion of a non-radial slit cut in a rotating disk.

The correlation between physical properties of metals used in explosive welding and the success of the weld is being investigated.

Checkout is continuing on a computer program to calculate strain in a blank formed into a frictionless die.

A ring cut in a chevron pattern has proved effective in controlling edge pull-in of explosively formed domes. The chevrons contract to form the ring and engage a weld bead on the rim of the blank to limit the amount of pull-in.

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Blank pull-in Plastic Strain Calculation Explosive Forming Shock Hardening Strain Rate Effect						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

END
DATE
FILMED
2-14-67